

Circular Connector

Russia Standard PC Type

ETC15-RCS01-PC4 type small connector




ETC15-RCS01-PC series are used widely in all kinds of electronic equipment. This connect is small in size and light in weight. The flange are round and square.

Technical characteristics

- Operating voltage: 250V
- Rated current: 5A
- Contact Resistance : <math>< 5M\Omega</math>
- Insulation resistance: <math>< 3000M\Omega</math>
- Temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Relative Humidity: 93% at $40 \pm 2^{\circ}\text{C}$
- Atmospheric pressure: 101.33~6.7kpa
- Vibration, the peak impact acceleration: 10~2000Hz 196m / s²
- Mechanical shock, the peak impact acceleration: 196m / s²
- Endurance : 500cycles
- Water proof: IP \geq 68
- The connect is water-repellent in one meter deep water for 30 minutes



Structure of Insulator

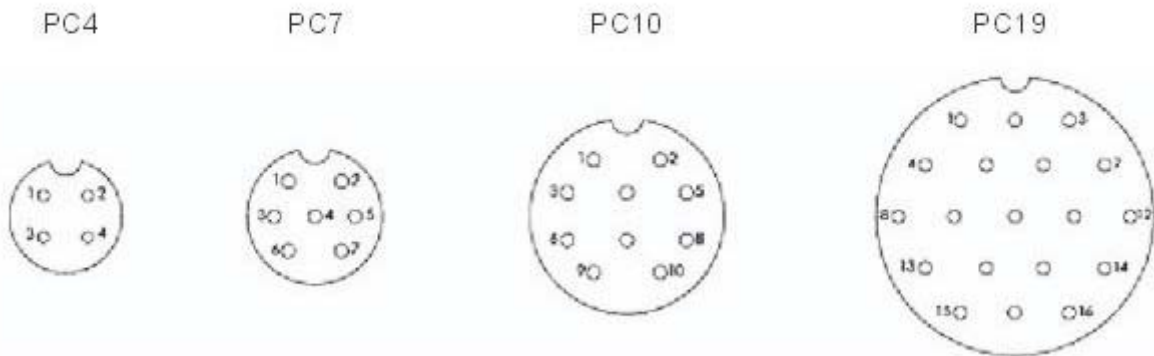

ORDER INFORMATION

Product NO.: ETC15-RCS01-PC4 T B

Pins: 4, 7, 10, 19pin

Type: T-Plug (Female+Cover)
B-Flange Receptacle
F- Female Plug
C-Cover



T-Plug (Female+Cover)



B-Flange Receptacle



C-Cover

All specification & dimensions are subject to change, please call your nearest ETC sales representative for update information

