

Switch

DIP Switch Series

ETC7-DA-Right Angle Type Dip Switch Series

SPECIFICATIONS

Mechanical life: 2000 operations per switch

Operation Force : $\leq 9.8\text{N}$ max.

Stroke: 2.0mm

Operation Temp: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Electrical life: 2000 operations per switch-24 VDC, 25mA

Contact Resistance: 50m max. at initial


Non-Switching Rating: 100mA, 50VDC

Switching Rating: 25mA, 24VDC






Circuit: Single pole single throw

Soldering and Cleaning Processes

Keep all switch contacts in their "OFF" position for all operations

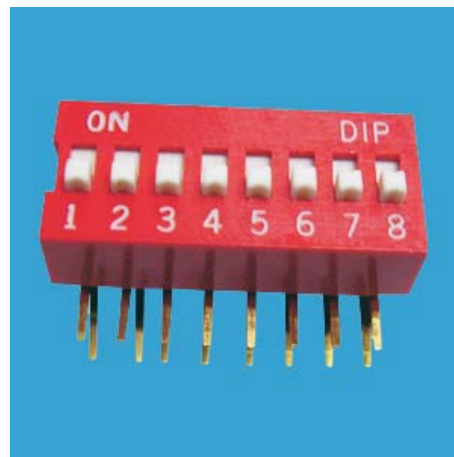

Model No.	No. Pos.	A
DA-01	1	4.10
DA-02	2	6.64
DA-03	3	9.18
DA-04	4	11.72
DA-05	5	14.26
DA-06	6	16.80
DA-07	7	19.34
DA-08	8	21.88
DA-09	9	24.42
DA-10	10	26.96
DA-12	12	32.04

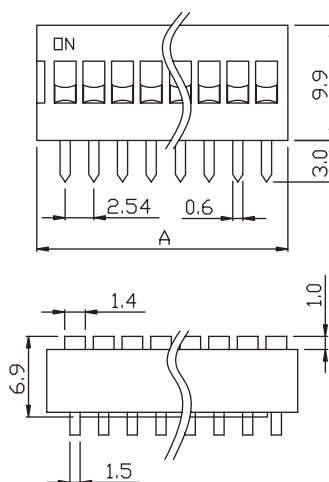

ORDER INFORMATION

ETC7-DA-XX-R-0 0

Part Number

DA : Bulge Type Dip Switch

DAR: Recessed Type Dip Switch

Number of Pos.: 01~12 Pos.

Packing: 0=Tube 1=Tape

0: Non-sealed

1: With sealed

Color: R=Red B=Blue N=Black