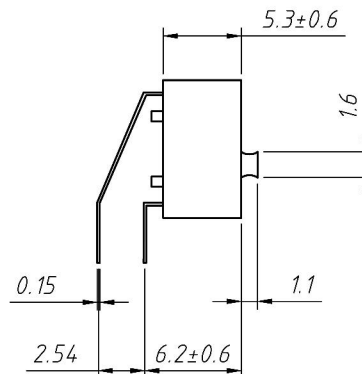
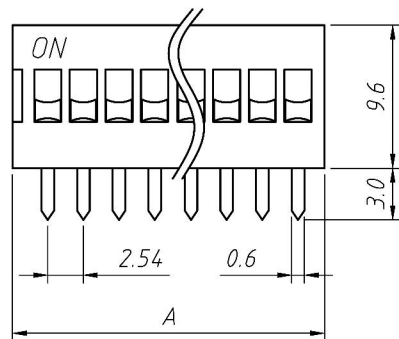


PCB Layout

Switching Characteristics:
Mechanical life: 2000 operations per switch
Operation Force : ≤9.8N max.
Stroke: 2.0mm
Operation Temp: -20°C ~ +70°C
Electrical life: 2000 operations per switch-24 VDC 25mA
Contact Resistance: 50m max. at initial
Non-Switching Rating: 100mA, 50VDC
Switching Rating: 25mA, 24VDC
Circuit: Single pole single throw
Contact: Half Gold/Sn

Model No.	No.Pos.	A
DAT-01	1	4.10
DAT-02	2	6.64
DAT-03	3	9.18
DAT-04	4	11.72
DAT-05	5	14.26
DAT-06	6	16.80
DAT-07	7	19.34
DAT-08	8	21.88
DAT-09	9	24.42
DAT-10	10	26.96
DAT-12	12	32.04

Order Information

L-ETC7-DAT-XX-X-X-X

Packaging: 0=Tube 1=Tape
 0:Non-sealed 1:With sealed
 Color:R=Red,B=Blue,N=Black
 Number of Pos.: 01~12 Pos.
 Bulge Type Dip Switch
 RoHS

Soldering and Cleaning Processes

Keep all switch contacts in their "OFF" position for all operations

GENERAL TOLERANCE	PROJECTION	Description:
X. ±0.50	UNITS	mm
.X ±0.25	SCALE	1:1
.XX ±0.10	Draw by:	Jenny
ANGLE TOLERANCE	Check by:	
X. ±5°	Date	2018-03-01
.X ±3°		
.XX ±2°	SHEET	1 OF 1



ETC ELECTRONICS CO., LTD.