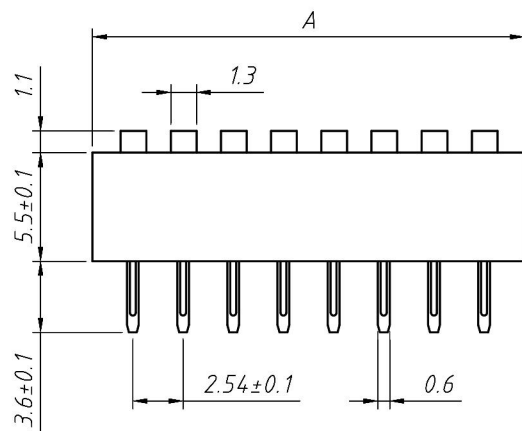


Material:

Cover: PBT plastic (red or blue)

Base: PBT plastic (black)

Operator: POM plastic (white)

Stock: epoxy resin potting

Terminal: tin plated phosphor bronze,
Half Gold/Sn

Sealing tape: polyimide KAPTON

Switching Characteristics:

Switch Capacity: 25mA at 24VDC

Insulation Resistance: 100MΩ at 250VDC



Contact Resistance: 50mΩ max.

Insulation strength: 500VAC / 1min

Operation Force : 1000gf max.

Electrical life: 2000 times

Operation Temp: -20°C ~ +70°C

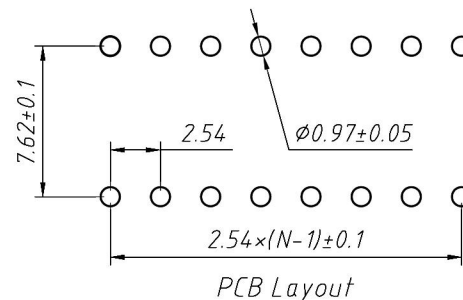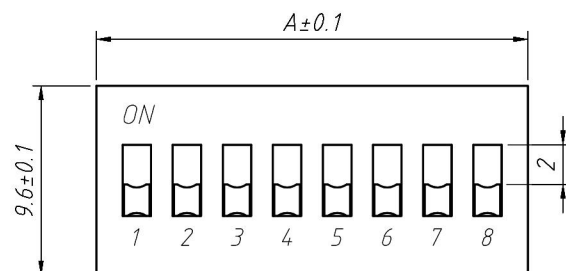

Order Information

L-ETC7-DST-08-R-0 0

Packaging: 0=Tube ;1=Tape

0:Non-sealed ;1:With sealed


Color:R=Red,B=Blue,N=Black

Number of Pos(01~12)

Bulge Type Dip Switch

RoHS

Model No.	No.Pos.	A
DST-01	1	4.10
DST-02	2	6.64
DST-03	3	9.18
DST-04	4	11.72
DST-05	5	14.26
DST-06	6	16.80
DST-07	7	19.34
DST-08	8	21.88
DST-09	9	24.42
DST-10	10	26.96
DST-12	12	32.04

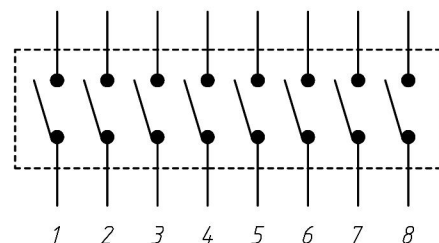

Circuit diagram

Manual welding: 320 degrees C no more than 2 seconds. (30 watt iron max.)

Wave soldering: 260 degrees C no more than 5 seconds, in the welding and cleaning process switch is open state.

GENERAL TOLERANCE	PROJECTION	Description:
X. ±0.50	UNITS	mm
.X ±0.25	SCALE	1:1
.XX ±0.10	Draw by:	Jenny
ANGLE TOLERANCE	Check by:	
X. ±5°	Date	2018-03-01
.X ±3°		
.XX ±2°	SHEET	1 OF 1



ETC ELECTRONICS CO., LTD.

SPST Standary Slide type Half Gold/Sn

ETC P/N: L-ETC7-DST