



VII

DIP Switch Series
ETC7-KM End-stackable Through Hole Type DIP Switch

Contact Rating:	25 mA at 24VDC(switching) 100 mA at 50VDC(steady state)
Life:	1,000 cycles
Contact Resistance:	100mΩ Max.
Insulation Resistance:	100MΩ at 100VDC Min
Dielectric Strength:	300VAC Min
Storage Tempeeature:	-40°C ~ 85°C
Operating Tempeeature:	-25°C ~ 70°C.
Operation Force :	8N Max.



Base & Cover: PPS (UL94V-0)
 Actuator: PA46 (UL94V-0).
 Contacts: Brass, Gold /Tin Plate
 Terminals: Brass, Gold /Tin Plate

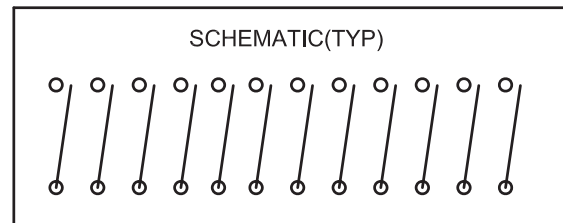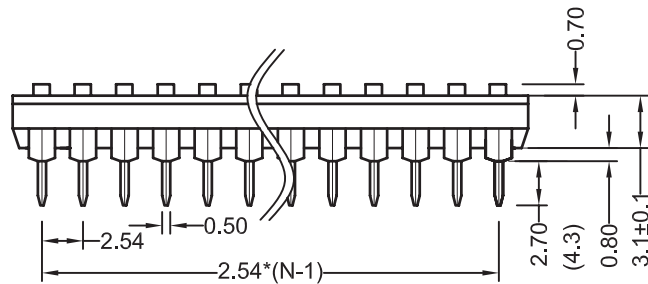

ORDER INFORMATION

Part Number _____

KM :Bulge Type Dip Switch _____

Number of Pos.: 01~12 Pos. _____

Packaging: 0=Tube
0:Non-sealed

Color: N=Black